




**SPECIFICATION SHEET**

<b>SPECIFICATION SHEET NO.</b>	N0626-KPB3070000L360
<b>DATE</b>	June 26, 2021
<b>REVISION</b>	A0
<b>DESCRIPTION</b>	<p>Thru Hole Single Bridge Rectifier, KBP Series, KPB307 Type, 4 Pins</p> <p>Reverse Voltage 600V Max. Forward Current 3.0A Max.</p> <p>Operating Temp. Range -55°C ~+150°C,</p> <p>Package in Bulk, 500pcs/Box</p> <p>RoHS/RoHS III compliant</p>
<b>CUSTOMER</b>	
<b>CUSTOMER PART NUMBER</b>	
<b>CROSS REF. PART NUMBER</b>	
<b>ORIGINAL PART NUMBER</b>	MDD KBP307
<b>PART CODE</b>	KPB3070000L360

<b>VENDOR APPROVE</b>			
Issued/Checked/Approved			
DATE: June 26, 2021			

<b>CUSTOMER APPROVE</b>	
DATE:	

**THRU HOLE BRIDGE RECTIFIER KBP SERIES**

**MAIN FEATURE**



- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated die construction
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed 260 °C/10 seconds

**APPLICATION**

- For printed circuit board

**RFQ**  
Request For Quotation

**PART CODE GUIDE**

<b>KBP</b>	<b>3070000</b>	<b>L</b>	<b>360</b>
1	2	3	4

- 1) **KBP**: Thru Hole Single Bridge Rectifier, KBP Series
- 2) **30700000**: Type code for original part number KBP307
- 3) **L**: Package code, In Bulk, 500pcs/Box.
- 4) **360**: Specification code for Reverse Voltage 600V Max. Forward Current 3.0A Max.


**MORE ITEMS AVAILABLE**

KPB2005000L205	KPB2010000L210	KPB2020000L220	KPB2040000L240	KPB2060000L260
KPB2080000L280	KPB2100000L20A			
KPB3005000L305	KPB3010000L310	KPB3020000L320	KPB3040000L340	<b>KPB3070000L360</b>
KPB3080000L380	KPB3100000L30A			

**THRU HOLE BRIDGE RECTIFIER KBP SERIES**



**DIMENSION (Unit: Inch/mm)**

Image for reference

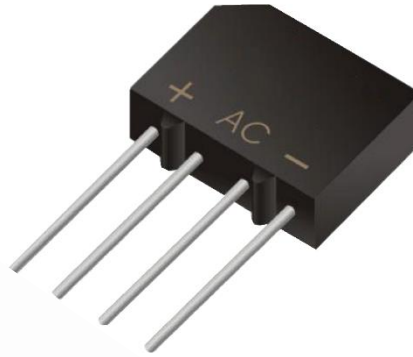

Marking: KBP307

KBP

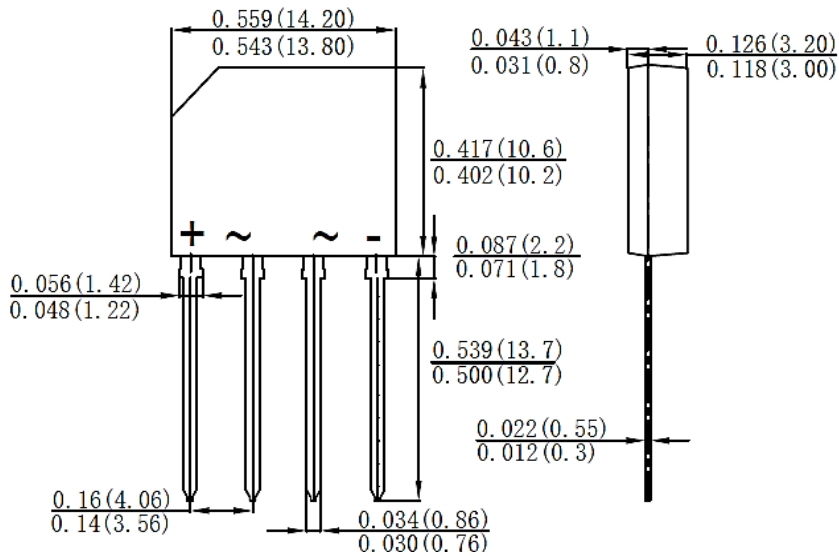

**THRU HOLE BRIDGE RECTIFIER KBP SERIES**
**MECHANICAL DATA**

Case	Terminals	Polarity	Mounting Position	Weight per piece
JEDEC KBP molded plastic body	Solder plated, Solderable per MIL-STD-750, Method 2026	Polarity symbol marking on body	Any	0.050 Ounce, 1.52 grams

**MAX. RATING & CHARACTERISTICS**

Parameter	SYMBOLS	VALUE			UNITS
		Min.	Typical	Max.	
Repetitive peak reverse voltage	V <sub>RRM</sub>			600	Volts
RMS voltage	V <sub>RMS</sub>			420	Volts
DC blocking voltage	V <sub>DC</sub>			600	Volts
Average forward output rectified current at T <sub>c</sub> = 50°C (see Note 3)	I <sub>AV</sub>			3.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>		55		A
Instantaneous forward voltage at 3.0A	V <sub>F</sub>			1.1	Volts
DC reverse current at rated DC blocking voltage	I <sub>R</sub>			5.0	μA
				0.5	mA
I <sup>2</sup> t Rating for fusing (3 ms ≤ t ≤ 8.3ms)	I <sup>2</sup> t		12.5		A <sup>2</sup> S
Junction capacitance (Note 2)	C <sub>J</sub>		40		pF
Thermal resistance (Note 3)	R <sub>QJA</sub>		40		°C/W
Operating junction temperature range	T <sub>J</sub>	-55		+150	
Storage temperature range	T <sub>STG</sub>	-55		+150	°C

**Note**

1. Ratings at 25 C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3. Thermal resistance junction to case, lead and ambient

**THRU HOLE BRIDGE RECTIFIER KBP SERIES**
**RELIABILITY**

Number	Experiment Items	Experiment Method And Conditions	Reference Documents
1	Solder Resistance Test	Test 260°C± 5°C for 10 ± 2 sec. Immerse body into solder 1/16" ± 1/32"	MIL-STD-750D METHOD-2031.2
2	Solderability Test	230°C ±5°C for 5 sec.	MIL-STD-750D METHOD-2026.1 0
3	Pull Test	1 kg in axial lead direction for 10 sec.	MIL-STD-750D METHOD-2036.4
4	Bend Test	0.5Kg Weight Applied To Each Lead, Bending Arcs 90 °C ± 5 °C For 3 Times	MIL-STD-750D METHOD-2036.4
5	High Temperature Reverse Bias Test	TA=100°C for 1000 Hours at VR=80% Rated VR	MIL-STD-750D METHOD-1038.4
6	Forward Operation Life Test	TA=25°C Rated Average Rectified Current	MIL-STD-750D METHOD-1027.3
7	Intermittent Operation Life Test	On state: 5 min with rated IRMS Power Off state: 5 min with Cool Forced Air. On and off for 1000 cycles.	MIL-STD-750D METHOD-1036.3
8	Pressure Cooker Test	15 PSIG, TA=121°C, 4 hours	MIL-S-19500 APPENOIXC
9	Temperature Cycling Test	-55°C~+125°C; 30 Minutes For Dwelled Time 5 minutes for transferred time. Total: 10 cycles.	MIL-STD-750D METHOD-1051.7
10	Thermal Shock Test	0°C for 5 minutes., 100°C for 5minutes, Total: 10 cycles	MIL-STD-750D METHOD-1056.7
11	Forward Surge Test	8.3ms Single Sale Sine-wave One Surge.	MIL-STD-750D METHOD-4066.4
12	Humidity Test	TA=65°C, RH=98% for 1000 hours.	MIL-STD-750D METHOD-1021.3
13	High Temperature Storage life Test	150°C for 1000 Hours	MIL-STD-750D METHOD-1031.5

**THRU HOLE BRIDGE RECTIFIER KBP SERIES**

**RATINGS AND CHARACTERISTIC CURVES (For Reference Only)**

Fig.1 Forward Current Derating Curve

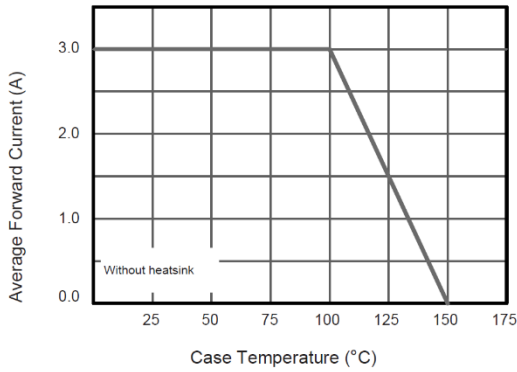


Fig.2 Typical Instantaneous Reverse Characteristics

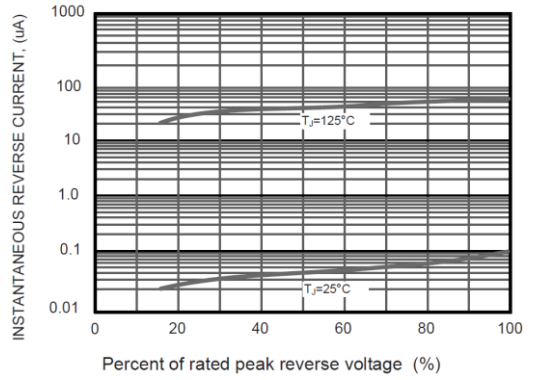


Fig.3 Typical Forward Characteristic

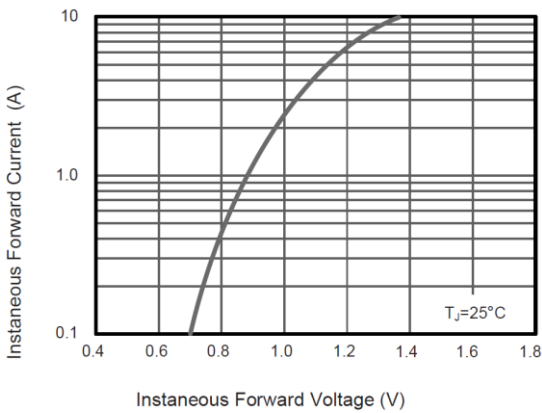


Fig.4 Typical Junction Capacitance

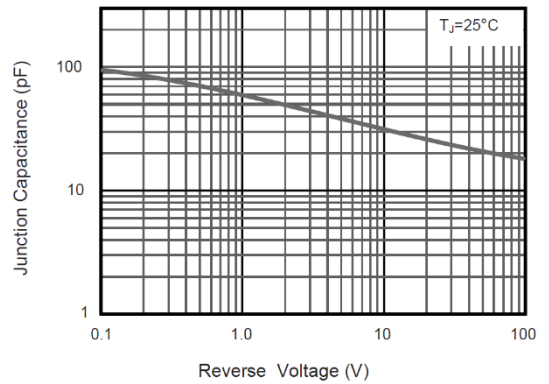


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


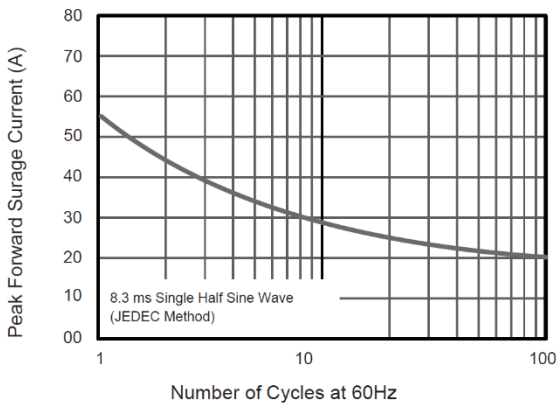


Fig.6- Typical Transient Thermal Impedance

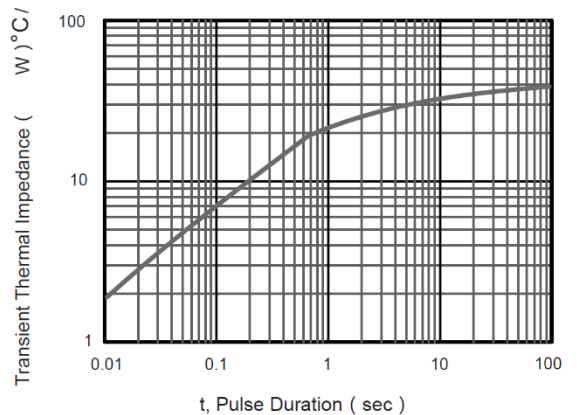

**THRU HOLE BRIDGE RECTIFIER KBP SERIES**

**PACKAGE**

Part Type	Qty. Per Box (pcs)	G.W per box (kg)	Inner Box L*W*H (mm)	Carton size L*W*H (mm)	Qty. Per Carton (pcs)	G. W (kg)
KBP	500	0.80	300*110*30	315*245*190	5,000	8.25

**DISCLAIMER**

NextGen Component, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information